
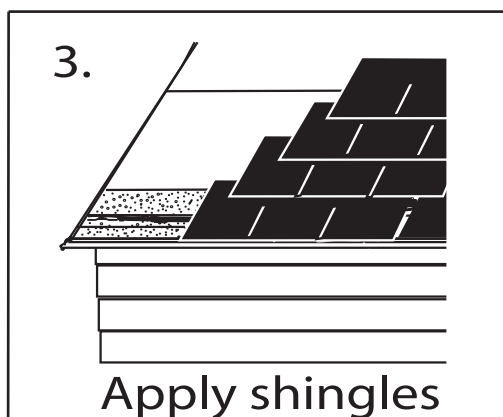
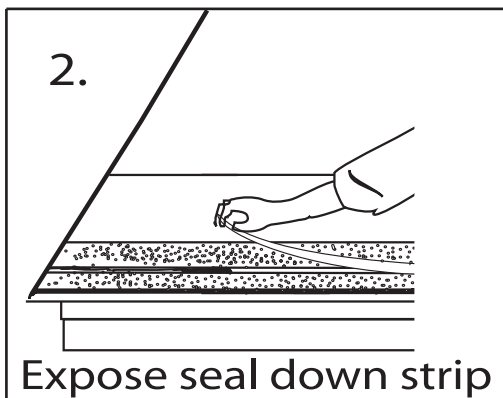


## Easy Installation

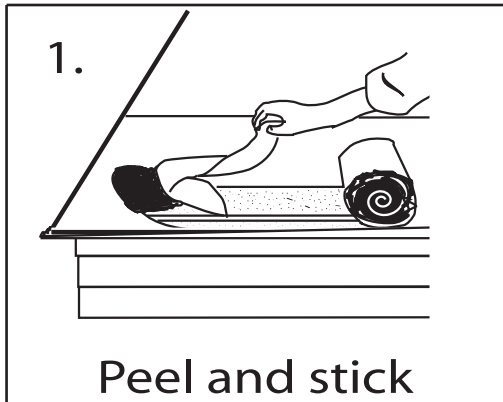

# Shingle Starter Strip Installation Instructions

## 1. Peel and Stick

- Align Shingle Starter Strip with the eave of the roof granular side up with the seal strip closest to the lower edge of the roof.

- Remove the release backer and press or roll Shingle Starter Strip to assure full adhesion to the deck.

- If nailing is necessary, install nails within 1" of the top edge of AC Starter Strip.

## 2. Expose seal down strip

- Remove the release tape from the seal strip.

## 3. Apply Shingle

- Once Shingle Starter Strip is installed, apply shingles according to the shingle manufacturer's instructions.

Surface preparation: All protrusions such as nails, dust and dirt must be removed. Surface must be clean, smooth and dry